

# **LBO** Crystals


SUPER POLISHED!

LBO (Lithium Triborate  $LiB_3O_5$ ) is a nonlinear optical crystal ideally suitable for various nonlinear optical applications. LBO crystals combine wide transparency, moderately high nonlinear coupling, high damage threshold and good chemical and mechanical properties.

#### **LBO** features

- Wide transparency range (160 nm – 2600 nm)
- Moderately high nonlinear coefficient
- · High damage threshold
- Type I and II and non-critical phase matching in a wide wavelength range
- · High optical homogeneity
- Wide acceptance angle and small walk-off angle

## Roughness measurements by ZYGO Interferometer

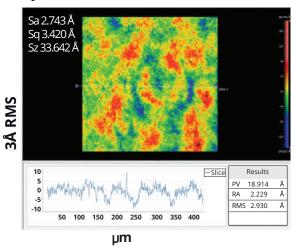


### **Special Advantages of Raicol's Super Polished LBO**

- Super polished elements for excellent surface quality: roughness < 3Å RMS and Scratch/Dig 2/1</li>
- Extremely low bulk absorption: up to 2 ppm/cm at 1064 nm
- Unmatched surface absorption
- Crystal size up to 100x100 mm<sup>2</sup>
- Maximum length of 80 mm
- High damage threshold higher than standard
- Ultra-high optical homogeneity
- · Advanced quality control
- · Automated work process to ensure high repeatability



## **Special Advantages of Raicol's Super Polished LBO**


Super polished elements for excellent surface quality: roughness < 3Å RMS and Scratch/Dig 2/1

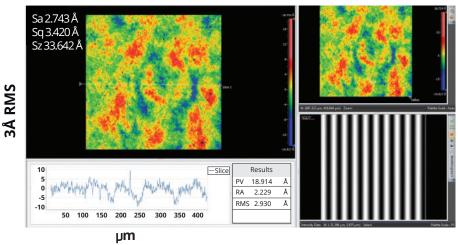


- \* Roughness measurements by ZYGO Interferometer.
- \* The standard roughness of Riacol's LBO is **3Å RMS**, compared to the industry's standard 9-10Å RMS LBO roughness.

#### **Unmatched surface absorption**

Raicol has developed the Super Polished LBO to minimize roughness which lowers surface absorption.

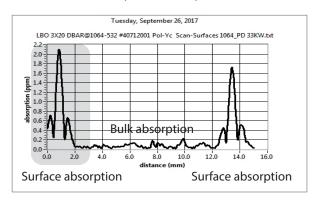

- \* A screen shot of actual bulk absorption test.
- \* Surface Absorption Graph for Uncoated Standard LBO @ 532 nm.
- \* Over 70% of total LBO crystal absorption occurs on the surface of the crystal.



- \* Comparison of surface absorption performed @ 532 nm on LBO crystal AR coated @1064/532 nm.
- \* Super polished LBO by Raicol (3Å as a standard) reduces surface absorption by 80%!



## **Special Advantages of Raicol's Super Polished LBO**

#### **Extremely low bulk absorption**

Bulk absorption will affect the long-term deterioration of the crystal - a critical factor in determining the crystal's life expectancy.

#### Results of 3 photon absorption tests by IPHT (355/1070):

Sample	Absorption coefficient at 1070nm (ppm/cm)
Raicol 1	(14.9 ± 1.5)
Raicol 2	(15.0 ± 1.5)
Ref. 3	(106.5 ± 10)
Ref. 4	(110.4 ± 10)

Sample	Absorption coefficient at 355nm – low intensity (ppm/cm)
Raicol 1	(5.5 ± 1.25)
Raicol 2	(5.0 ± 1)
Ref. 3	(4470 ± 355)
Ref. 4	(4291 ± 355)

<sup>\*</sup> Samples 1+2 are super polished Raicol LBO crystals.

#### **Higher Damage Threshold -**


#### Test Results of independent measurements of SPICA and Lumibird:

"Raicol's Super Polished LBO crystals show extremely high LIDT @ 355 nm and 532 nm."

#### **SPICA test results:**

LBO testing results @ 355 nm:


- \* Laser damage threshold measured as **18.00 J/cm**<sup>2</sup>, peak fluence.
- \* Part irradiated at **18.00 J/cm**<sup>2</sup> with no damage in 10 sites.

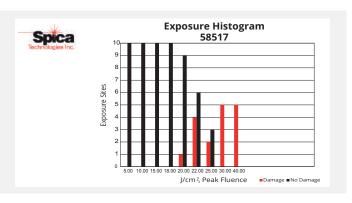

#### **Lumibird test results:**

LBO Testing Results @ 532 nm:

- \* Root T scaled: 17 J/cm<sup>2</sup> @ 8 ns is equivalent to **19 J/cm**<sup>2</sup> @ 10 ns.
- \* Root T scaled: 2124.41 MW/cm<sup>2</sup> @ 8 ns is equivalent to **1900.13 MW/cm<sup>2</sup>** @ 10 ns.



LUMIBIRD

<sup>\*</sup> Samples 3+4 are reference LBO crystals from other suppliers.

<sup>\*</sup> The 3 photon absorption tests by IPHT were conducted by Jenna University.



## **Typical Specifications**

Apertures	up to 100 x 100 mm <sup>2</sup>
Length	up to 80 mm along X axis
Flatness	Up to λ/10 @ 633 nm
Roughness	<3Å RMS
Parallelism	Up to 5 arc sec.
Perpendicularity	Up to 5 arc min.
Scratch/Dig	2/1 up to 0/0 per custom demand
AR Coatings	Dual band R < 0.1%
Absorption Coefficient	Bulk (1064 nm) < 2-4 ppm/cm Surface (1064 nm) < 1-2 ppm Bulk (532 nm) < 8 ppm/cm Surface (532 nm) < 1-2 ppm
Wavefront Distortion Control	λ/8 @ 633 nm
Guaranteed Damage Threshold	1800 MW/cm <sup>2</sup> @ 1064 nm 1200 MW/cm <sup>2</sup> @ 532 nm 1000 MW/cm <sup>2</sup> @ 355 nm For 10 ns pulses @ 10 Hz

Raicol Crystals, founded in 1995, is a global leader in nonlinear and EO crystals growth, fabrication and assembly. Raicol offers a unique set of benefits to its customers:

- 50 years of crystal growth experience
- The global pioneers of RTP, HGTR KTP and PPKTP crystals and assembly
- One-stop shop, from crystal growth through coating to EO Cell assembly
- Mass-production capabilities as well as small R&D quantities
- Fast delivery time
- Unmatched crystal quality